


EG-(SERIES)P72-C POLYCRYSTALLINE 72-CELL MODULE 325 ~ 345Wp

0-+3% POSITIVE TOLERANCE



* Black Frames Applied

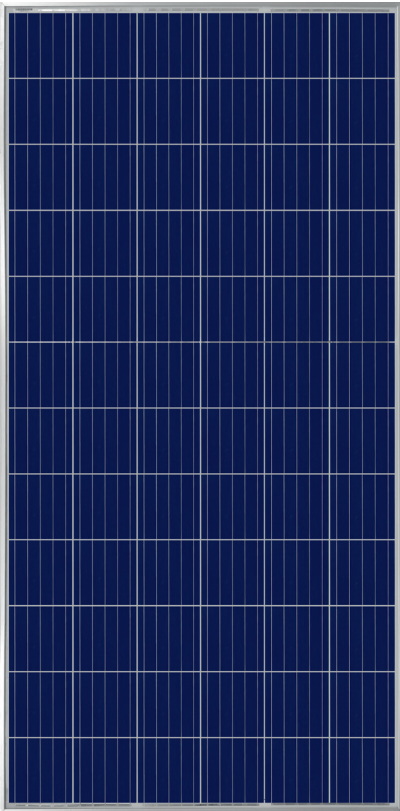

· ISO9001:2015, ISO14001:2015, ISO45001:2018
QC080000:2017, IEC TS 62941
certified factory


· IEC61215, IEC61730, UL1703, IEC62804, IEC62716
certified product

KEY FEATURES



- High Efficiency**
 Leading PERC technology achieves higher module efficiency up to 17.82%
- Excellent Low-light Performance**
 Advanced solar cell surface texturing technology allows for excellent performance in low-light environments
- High Reliability**
 Strict in-house testing in PV Lab which is CNAS approved & VDE certified
- Highly Strengthened Design**
 Certified to withstand: 5400Pa snow load and 2400Pa wind load
- PID Resistant**
 Excellent PID optimized, 1% less power degradation

LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty · 25 Year Linear Power Warranty

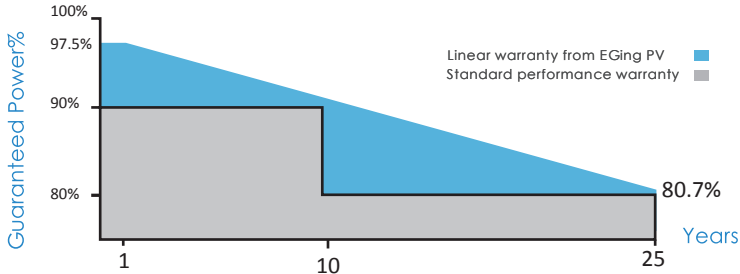

As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGing PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

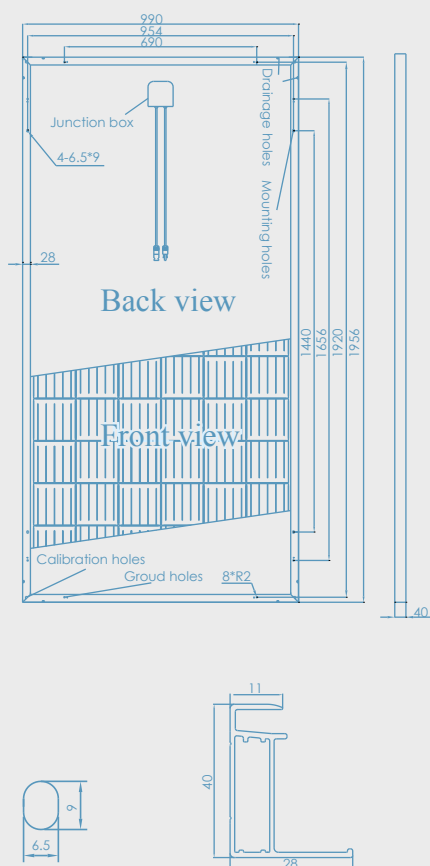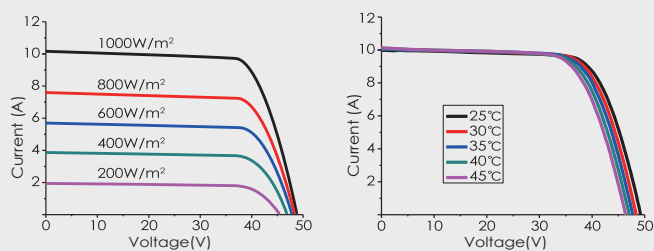Engineering Drawings

I - V Curves

Packing Configuration

Pieces per pallet	27
Size of packing (mm)	1980*1140*1140
Weight of packing (kg)	599
Pieces per container	648
Size of container	40' HC

Electrical Characteristics

STC	EG-325 P72-C	EG-330 P72-C	EG-335 P72-C	EG-340 P72-C	EG-345 P72-C
Pmax (W)	325	330	335	340	345
Vmp (V)	37.36	37.59	37.82	38.04	38.21
Imp (A)	8.70	8.78	8.86	8.94	9.03
Voc (V)	46.25	46.49	46.95	47.21	47.40
Isc (A)	9.16	9.24	9.32	9.40	9.48
Module efficiency (%)	16.78	17.04	17.30	17.56	17.81
Maximum system voltage (V)	1000				
Fuse Rating Current (A)	20				
Power tolerance (%)	0~+3				
Temperature coefficient	Pmax (%/°C)	-0.405			
	Isc (%/°C)	0.041			
	Voc (%/°C)	-0.298			

STC: Irradiance 1000W/m², module temperature 25°C, AM=1.5

NOCT	EG-325 P72-C	EG-330 P72-C	EG-335 P72-C	EG-340 P72-C	EG-345 P72-C
Pmax (W)	237.83	241.54	245.25	248.95	253.78
Vmp (V)	33.75	34.09	34.43	34.74	35.15
Imp (A)	7.04	7.08	7.12	7.16	7.22
Voc (V)	42.72	42.97	43.44	43.72	43.95
Isc (A)	7.44	7.50	7.56	7.62	7.67
Power tolerance (%)	0~+3				

NOCT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Number of cells (pcs)	72
Size of cell (mm)	156.75*156.75
Type of cell	Poly
Thickness of glass(mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	1956*990*40
Weight (kg)	20.5
Cables/connectors	4mm ² MC4 compatible
Length of Cabel(mm)	1200

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice - ball with velocity of 23m/s